

OSTROLENK, FABER, GERB & SOFFEN, LLP

Attorneys at Law

1180 Avenue of the Americas
New York, New York 10036-8403

(212) 382-0700

Telex
23 6925

Facsimile
(212) 382-0888

Cable
Ostrofaber NewYork

A

Express Mail #EL010259894US

Hon. Commissioner of Patents and Trademarks
Washington, DC 20231

OFGS File No. : P/29-920
Inventor : Toshifumi SATO
Title : CELLULAR COMMUNICATION SYSTEM, AND MOBILE AND
BASE STATIONS USED IN THE SAME
Assignee : NEC Corporation

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

26 Pages of Specification including Abstract and Claims
24 Numbered Claims Calculated as 24 Claims for Fee Purposes
6 Sheets of Drawing Containing Figures 1 to 6.
X Declaration and Power of Attorney
X Priority is Claimed under 35 U.S.C. §119:
Convention Date June 9, 1997 for Japan Appln. S.N. 9-151072
X Certified Priority Application
 Verified Statement Claiming Small Entity Status under 37 C.F.R. §1.27.
X Assignment
X Return-Addressed Post Card

OFGS Check No. 76507, which includes the fee of \$1,164.00, calculated as follows:

Basic Filing Fee:	\$ 790.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times \$22:	88.00
Number of Independent Claims in Excess of 3, times \$82:	246.00
One or More Multiple Dependent Claims: Total \$270:	
Total Filing Fees or	1,124.00
Total Filing Fee Reduced 50% for Small Entity:	
Assignment Recording Fee: \$40	40.00
TOTAL Filing Fee and Assignment Recording Fee:	<u>\$1,164.00</u>

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

Respectfully submitted,

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL010259894US) in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on June 3, 1998.

Dorothy Jenkins

Name of Person Mailing Correspondence,

Dorothy Jenkins
Signature
June 3, 1998

Date of Signature

Steven I. Weisburd
Steven I. Weisburd
Registration No.: 27,409
OSTROLENK, FABER, GERB & SOFFEN, LLP
1180 Avenue of the Americas
New York, New York 10036-8403
Telephone: (212) 382-0700

Cellular Communication System,
and Mobile and Base Stations Used in the Same

BACKGROUND OF THE INVENTION

5 The present invention relates to a mobile communication system, and particularly to a handover technique for mobile or portable telephone systems (cellular systems) using a direct spread code division multiple access (DS-CDMA) system. More particularly, it relates to a transmit power control of
10 down links for transmission from plural base stations to a mobile station during soft handover where the mobile station is simultaneously connected to the plural base stations.

 A conventional technique well known in the art is a cellular system using a code division multiple access (CDMA)
15 system conforming a North American TIA/EIA IS-95 standard. This IS-95 standard uses soft handover. In a system using such a soft handover technique, when a mobile station approaches a boundary between cells (or sectors), the mobile station simultaneously communicates with plural base stations
20 each having one of the cells as its service area.

 When the mobile station detects a base station or stations at reception levels larger than the base station currently in communication therewith, the mobile station regards itself as approaching a cell boundary and starts
25 communication with plural base stations including the currently connected base station and other base stations detected at the larger reception levels. The mobile station

then receives the same downward information from the plural base stations, where the downward information from the plural base stations is received at the mobile station by a maximal ratio combining diversity.

5 Upward information transmitted from the mobile station is received at the plural base stations. These received signals are maximal ratio combined or one of these signal is by a base station controller (BSC) which supervises the plural base stations.

10 In general, any mobile station located near a cell boundary is likely far at a distance from the base station in the cell, and the reception level of downward signals from the base station would be low. Further, the channel quality is likely deteriorated near the cell boundary due to radio
15 interference from plural cells. Such deterioration of the channel quality can be prevented by connecting the mobile station to plural base stations (by a soft handover).

In a conventional technique such as one conforming the IS-95 standard, the downward signals are simultaneously
20 transmitted from plural base stations during soft handover. Such a system extremely increases the number of currently used down links compared with cellular systems not using the soft handover. An increase in the number of mobile stations during soft handover limits the number of links that can be
25 used simultaneously because of a limited capacity of down links to cause a latent problem that efficiency in channel utilization can not be improved.

Although the IS-95 standard seems to use such an ineffective method that it transmits downward signals from plural base stations, the capacity of down links has not caused any problem because the transmission system of down links has been more effective than that of up links.

However, the capacity of up links is now improving as much as that of down links, and the deterioration in the capacity of down links due to the soft handover needs to be solved.

SUMMARY OF THE INVENTION

It is therefore the main object of the present invention to provide a soft handover scheme capable of improving efficiency of down links in a CDMA mobile communication system by improving a downstream transmission system in a soft handover with a terminal located near a cell or sector boundary.

According to one aspect of the invention, there is provided a cellular system using a direct spread code division multiple access system, in which a mobile station performs soft handover with plural base stations,

said mobile station comprising:

downward reception quality monitoring means for monitoring reception quality of downward signals from the plural base stations that are in the soft handover state;

base-station specifying means for sending a signal to specify a base station or stations to be transmitted according to the result of monitoring the reception quality

of the plural downward signals;

 multiplexing means for multiplexing the base-station specify signal into an upward signal to be sent to said plural base stations; and

5 reception means for performing combined reception of receive signals from said plural base stations that are in the soft handover state, and

 said base stations each comprising:

10 demodulation means for demodulating the base-station specify signal multiplexed in the upward signal; and

 transmission control means for controlling transmission of a downward transmit signal to a corresponding mobile station according to the demodulated base-station specify signal.

15 The mobile station monitors quality of downward signals from plural base stations in a handover state and multiplexes into an upward signal a signal to specify the best-quality base station. This permits only the base station in good channel conditions to perform downstream transmission even at
20 the time of handover with inhibiting transmission from the other base stations, thus improving the frequency utilization efficiency of down links.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Fig. 1 is a block diagram showing the structure of a mobile station according to a first embodiment of the present invention;

 Fig. 2 is a block diagram showing the structure of a

base station according to the first embodiment of the present invention;

Fig. 3 is a view illustrating the movement of a mobile station that enters a soft handover operation of the present invention;

Fig. 4 is a time chart for comparing the prior art and the present invention, which shows a relationship between reception quality and transmission ON/OFF timing;

Fig. 5 is a block diagram showing the structure of a mobile station according to a second embodiment of the present invention; and

Fig. 6 is a block diagram showing the structure of a base station according to the second embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring next to the accompanying drawings, the present invention will be described.

Fig. 1 is a block diagram showing the structure of a mobile station according to a first embodiment of the present invention; Fig. 2 is a block diagram showing the structure of a base station according to the first embodiment of the present invention.

As shown in Fig. 1, the mobile station according to the first embodiment of the present invention comprises an antenna 101 for receiving radio signals from one or more base stations; a duplexer (DUP) 102; a radio receiving part (Rx) 103 for converting a radio signal to a receive base-band

signal; reception quality monitoring means 104 for receiving pilot signals from plural base stations during handover and monitoring the level of reception quality; base-station specifying means (B.S.S.M) 105 for selecting base stations of good receiving quality based on the monitoring results and outputting a base-station select signal (BSsel) corresponding to the base stations of good reception quality; a multiplexer (MUX) 109 for multiplexing an associated control channel including the base-station select signal (BSsel) and upward communication channel data (r-txd) to generate an upward transmit signal; a spreading circuit 110 for spreading the upward transmit signal to output a transmit base-band signal; a radio transmitting part (Tx) 111 for converting the transmit base-band signal to a radio signal to be transmitted; and an RAKE receiver 108 for performing combined reception of receive base-band signals from plural base stations that are in a soft handover state.

The RAKE receiver 108 includes a correlator 106 and a maximal ratio combiner 107 for outputting downward communication channel data (f-txd).

The downward reception quality monitoring means 104 of the mobile station measures the level of reception quality using a pilot channel transmitted from each base station to all the mobile stations.

The base-station specifying means 105 selects base stations out of plural ones as having good downward reception quality, and outputs a base-station select signal indicative

of the selected base stations. For this selection, any of the following criteria can be used:

(1) A base station showing the best reception quality and other base stations each of which has a small difference in reception quality from the best one are selected.

(2) A predetermined number of base stations equal to or less than the number of the base stations to be targeted in the current handover are selected in the order of the superiority of reception quality.

(3) Base stations showing reception quality larger than a predetermined value are selected. When all the base stations show reception quality smaller than the predetermined value, a predetermined number of base stations are selected in the order of the superiority of reception quality. This optional condition is provided to prevent all the base stations from stopping transmission when the downward-signal receiving quality is low at the mobile station.

Referring to Fig. 2, each base station according to the first embodiment of the present invention can be divided into a common section commonly used for plural communication channels and channel sections separately used for each communication channel.

The common section comprises an antenna 201 for receiving radio signals from mobile stations; a duplexer (DUP) 202; a radio receiving part (Rx) 203 for converting a radio signal to a receive base-band signal; a spreading

circuit 218 for spreading a pilot channel (PLCH); and an adder 209 for adding and combining the pilot channel and transmit signals of plural channels from the plural channel sections 208. The pilot channel and the plural communication channels use different spread codes from each other.

The channel section 208 necessary for each communication channel comprises an RAKE receiver 204 for reversely spreading signals received on a multipath channel and combining them at the maximum ratio; a demultiplexer (DMUX) 205 for separating the output of the RAKE receiver 204 into upward communication channel data (r-rxd) and the associated control channel including the base-station select signal (Bssel); a spreading circuit 206 for spreading downward communication channel data (f-txd); and transmission control means 207 for controlling transmission ON/OFF according to the base-station select signal (Bssel) included in the associated control channel data from the mobile station.

Referring next to Fig. 3, operations in the first embodiment of the present invention will be described.

Fig. 3 is a view illustrating the movement of a mobile station when performing a soft handover operation to be described below. In this case, when a mobile station (MS) 303 moves from a service area of a base station (BS1) 301 to another service area of another base station (BS2) 302 and enters a service-area overlapping zone, it becomes a soft handover state and the base station (BS2) also receives the upward communication channel data from the mobile station.

The base station (BS2) informs the base station controller (BSC) 304 the reception of the downward communication channel data from the mobile station. The base station controller maximal-ratio-combines the received downward communication channel data at the base stations 301 and 302. the combined data is transmitted to a mobile station exchngr (MSC) 305. Then, the mobile station exchngr transfers the downward communication channel data not only to the base station (BS1) but also to the base station (BS2). These operations are the same as the prior art, such as IS-95 standards.

The operations of the base stations (BS1, BS) and the mobile station on the downward communication channel data are now described. In this example of Fig. 3, all the above criteria becomes the same and only one base station showing reception quality better than the other is selected.

The transmission control means 207 of each of the base stations 301 and 302 stops transmission when its own base station is not specified in the base-station select signal. The transmission control means 207 performs transmission to the mobile station when its own base station is specified in the base-station select signal or a transmission error in the base-station select signal is detected; otherwise, it will stop transmission.

Fig. 4 is a time chart showing transitions of downward reception quality of the base stations 301 and 302, and transmission ON/OFF timing of each of the base stations (BS1

and BS2) 301 and 302.

In a conventional scheme (e.g., IS-95) as shown at a) and b) in Fig. 4, when the difference in reception quality between both base stations becomes smaller than a certain value, the two base stations enter a soft handover state and start transmission to the mobile station. This soft handover state continues until the difference in reception quality between both base stations becomes equal to or more than the certain value and the mobile station completely enters the service area of the new base station (BS2) 302. Thus in the conventional the two base stations perform transmission to the mobile station during the soft handover.

On the other hand, shown at c) to e) in Fig. 4 are the base-station select signals and transmission ON/OFF timings of the two base stations (BS1 and BS2) 301 and 302 in the embodiment of the invention. This shows that the base-station select signal varies with changes in the reception quality even during handover, and the transmission is always performed from only one base station in a propagation state better than the other.

The procedure for soft handover in the case of Fig. 3 is as follows:

[1] The mobile station 303 measures the reception quality of pilot channels from nearby base stations and reports the measurement result to the base stations in the same manner as in the conventional. When a base station or stations each showing reception quality of the pilot channel

within a certain range of differences from that of the base station currently in communication with the mobile station 303 are detected, they enter the soft handover state.

5 [2] The base station currently in communication with the mobile station of identification numbers of base stations which are in soft handover state.

10 [3] The plural base stations that are in the soft handover state receive upward information from the mobile station in the same manner as in the conventional by a maximal ratio combining or selective diversity.

15 [4] The mobile station monitors the quality of the pilot channel of each base station in the soft handover state, and notifies all the base stations of a number of the best-quality base station using the upward associated control channel. The quality measurement and notification is not necessarily fast enough to track Rayleigh fading as long as it can track changes in the propagation path (shadowing).

20 [5] Only the base stations specified by the mobile station 303 are permitted to send downward information. In order to avoid the danger that no base station sends downward information, it is possible to permit the other base stations to send downward information when they have detected an error in CRC of the associated control channel.

25 [6] The mobile station 303 receives signals from the plural base stations using a selective or maximal ratio combining diversity.

[7] The soft handover is released when the difference

in the reception quality of the pilot channel becomes equal to or more than the certain value.

By operating the base stations and the mobile station 303 in the above procedure, only some base stations of good propagation quality perform downstream transmission and the other base stations of inferior propagation quality do not need to perform downstream transmission. It is therefore possible to improve the frequency utilization efficiency of down links.

The mobile station 303 measures the quality of down links using the pilot channel, which is always transmitted at each base station and commonly used by all the mobile station to perform base station search. For this reason, the mobile station can also monitor the quality of down links of other base stations that have stopped transmission to the mobile station, and hence instruct these base stations to restart downstream transmission thereto.

When judging that the down links of plural base stations show almost equal quality and the received signals from the plural base stations can be combined at the maximum ratio without any loss, the mobile station 303 instructs the corresponding plural base stations to perform downstream transmission so that a diversity gain can be obtained.

When judging that the quality of down links of all the base stations is deteriorated and required quality can not be obtained by the transmission from one base station, the mobile station instructs plural base stations of relatively

good reception quality to perform downstream transmission so that the required quality can be obtained.

The danger of an error in receiving the base-station select signal transmitted from the mobile station 303 must be considered here. Particularly, in the case the soft handover is performed across plural base stations, respective base stations may cause a different demodulation result and no base station may judge to be instructed for transmission. To avoid such a case, each base station performs transmission without receiving the instruction when an error in the demodulation result has been detected, thus extremely reducing the probability of no base station performing transmission [see the above procedure [5]].

However, if it is assured that plural base stations cause the same demodulation result of the base-station select signal, they can perform transmission ON/OFF according to the base-station select signal irrespective of the presence or absence of the error detection. For example, when the soft handover is performed for plural sectors within one base station, the demodulation result of the base-station select signal can be easily used among the sectors in common. In this case, the transmission sectors may be selected according to the base-station select signal.

Referring next to Figs. 5 and 6, a second embodiment of the present invention will be described. Fig. 5 is a block diagram showing the structure of a mobile station according to the second embodiment of the present invention; Fig. 6 is

a block diagram showing the structure of a base station according to the second embodiment of the present invention.

As apparent from a comparison between Figs. 1 and 5, the mobile station of the second embodiment does not include means like the base station specifying means 105 included in the first embodiment. Alternatively, the mobile station according to the second embodiment is such that the results of monitoring the reception quality of pilot signals from acceptable base stations are supplied to a multiplexer 109a together with signals to specialize corresponding base stations. The multiplexer 109a multiplexes outputs of the reception quality monitor and the upward communication channel data (r-txd) to generate an upward transmit signal to be transferred to the spreading circuit 110. Operations of the other elements in Fig. 5 are the same as those of the mobile station shown in Fig. 1.

Also as apparent from a comparison between Figs. 2 and 6, the base station of the second embodiment includes a demultiplexer (DMUX) 205b provided between the RAKE receiver 204 and the transmission control means 207 for separating the output of the RAKE receiver 204 into "upward communication channel data (r-txd)" and "the reception quality of the pilot signal and the signal to specialize the corresponding base station" detected by the mobile station (Fig. 5); and transmission halt signal generating means 105a for generating a transmission halt signal indicating whether or not transmission of all the signals but the pilot signal are to

be halted at its own station and supplying the transmission halt signal to the transmission control means 207. The structure and the operation of the transmission halt signal generating means 105a are the same as those of the base station specifying means of Fig. 1. The other elements of which the description is omitted are operated in the same manner as those given the common reference numbers in Fig. 2.

As apparent from the above, the first embodiment and the second embodiment differ in the following point: In the first embodiment the mobile station decides which of base stations is to stop downstream transmission during soft handover, while in the second embodiment the base station decides which of base stations is to stop downstream transmission during the soft handover. Since the second embodiment does not need the base station specifying means 105 essential for the mobile station (Fig. 1) in the first embodiment, the mobile station of the second embodiment can be made compact compared with that of the first embodiment. The second embodiment can also reduce the power consumption compared with the first embodiment.

The transmission halt signal generating means 105a of the second embodiment can use any criterion such as one of the following three criteria for outputting the transmission halt signal.

(1a) The transmission halt signal generating means outputs the transmission halt signal to a mobile station when the downward signal from its own station to the mobile

station shows a large difference in reception quality from that of the best-quality base station.

(2a) The transmission halt signal generating means outputs the transmission halt signal to a mobile station when the reception quality of the downward signal from its own station to the mobile station is ranked lower than a predetermined one graded according to their reception quality.

(3a) The transmission halt signal generating means outputs the transmission halt signal to a mobile station when the reception quality of the downward signal from its own station to the mobile station is smaller than a predetermined value. When all the base stations show reception quality smaller than the predetermined value and the reception quality of its own base station is ranked higher than the predetermined one graded according to their reception quality, the transmission halt signal generating means does not output the transmission halt signal even if the reception quality of the downward signal is smaller than the predetermined value. This optional condition is provided to prevent all the base station in the soft handover state from stopping transmission to the mobile station when the reception quality of the downward signals is low at the mobile station.

As described above, according to the present invention, since only a small number of base stations of the best quality perform downstream transmission even at the time of

soft handover, the frequency utilization efficiency of down links is not reduced. It is therefore possible to avoid limitations on the channel capacity.

5 The present invention is also to prevent transmission from the base station in an inferior propagation state even at the time of soft handover, so that mean transmission power of the base station can be reduced, thereby simplifying the transmission power amplifier at the base station.

10 Modifications of the invention herein disclosed will occur to a person skilled in the art and all such modifications are deemed to be within the scope of the invention as defined by the appended claims.

What is Claimed is:

1. A cellular system using a direct spread code division multiple access system, in which a mobile station performs soft handover with plural base stations,

said mobile station comprising:

downward reception quality monitoring means for monitoring reception quality of downward signals from the plural base stations that are in the soft handover state;

base-station specifying means for sending a signal to specify a base station or stations to transmit according to the result of monitoring the reception quality of the plural downward signals;

multiplexing means for multiplexing the base-station specify signal into an upward signal to be sent to said plural base stations; and

reception means for performing combined reception of receive signals from said plural base stations that are in the soft handover state, and

said base stations each comprising:

demodulation means for demodulating the base-station specify signal multiplexed in the upward signal; and

transmission control means for controlling transmission of a downward transmit signal to a corresponding mobile station according to the demodulated base-station specify signal.

2. The cellular system according to claim 1, wherein said downward reception quality monitoring means of said

mobile station measures reception quality using a pilot channel transmitted from each of said base stations to all the mobile stations constantly.

3. The cellular system according to claim 1, wherein said transmission control means of said base station stops transmission when the base-station specify signal is not directed to its own base station.

4. The cellular system according to claim 3, wherein said transmission control means of said base station performs transmission when the base-station specify signal is directed to its own base station or a transmission error in the base-station specify signal is detected.

5. The cellular system according to claim 1, wherein said base station specifying means of said mobile station specifies plural base stations when the differences of downward reception quality of all the base stations is smaller than a predetermined value.

6. The cellular system according to claim 1, wherein said base station specifying means of said mobile station specifies plural base stations when downward reception quality of all the base stations is smaller than a predetermined value.

7. In a cellular system using a direct spread code division multiple access system, a mobile station used in the cellular system for performing soft handover with plural base stations, comprising:

downward reception quality monitoring means for

monitoring reception quality of downward signals from the plural base stations that are in the soft handover state;

base-station specifying means for sending a signal to specify a base station or stations to transmit according to the result of monitoring the reception quality of the plural downward signals;

multiplexing means for multiplexing the base-station specify signal into an upward signal to be sent to said plural base stations; and

reception means for performing combined reception of receive signals from said plural base stations that are in the soft handover state.

8. The mobile station according to claim 7, wherein said downward reception quality monitoring means of said mobile station measures reception quality using a pilot channel transmitted from each of said base stations to all the mobile stations constantly.

9. The mobile station according to claim 7, wherein transmission control means of each of said base stations stops transmission when the base-station specify signal is not directed to its own base station.

10. The mobile station according to claim 9, wherein said transmission control means of said base station performs transmission when the base-station specify signal is directed to its own base station or a transmission error in the base-station specify signal is detected.

11. The mobile station according to claim 7, wherein

said base station specifying means of said mobile station specifies a base station of the best downward reception quality out of the plural base stations and specifies other base stations each having a smaller difference than a predetermined value from the base station of the best quality.

12. The mobile station according to claim 7, wherein said base station specifying means of said mobile station specifies plural base stations when downward reception quality of all the base stations is smaller than a predetermined value.

13. In a cellular system using a direct spread code division multiple access system, a base station, used in the cellular system in which a mobile station performs soft handover with plural base stations, comprising:

demodulation means for demodulating a base-station specify signal multiplexed in an upward signal; and

transmission control means for controlling transmission of a downward transmit signal to a corresponding mobile station according to the demodulated base-station specify signal.

14. The base station according to claim 13, wherein said transmission control means of said base station stops transmission when the base-station specify signal is not directed to its own base station.

15. The base station according to claim 14, wherein said transmission control means of said base station performs

transmission when the base-station specify signal is directed to its own base station or a transmission error in the base-station specify signal is detected.

16. A cellular system using a direct spread code division multiple access system, in which a mobile station performs soft handover with plural base stations,

said mobile station comprising:

reception quality monitoring means for monitoring reception quality of downward signals from the plural base stations that are in the soft handover state and outputting a sub-signal composed of the monitoring results and signals indicative of base stations corresponding to the respective results;

multiplexing means for multiplexing the sub-signal into an upward signal to be sent to said plural base stations; and

reception means for performing combined reception of receive signals from said plural base stations that are in the soft handover state, and

said base stations each comprising:

demodulation means for demodulating the sub-signal multiplexed in the upward signal;

transmission halt signal generating means for generating a transmission halt signal indicating whether or not transmission of downward signals from its own station are to be halted in accordance with the demodulated sub-signal; and

transmission control means for stopping the transmission of downward signals to said mobile station when the

transmission halt signal indicates transmission halt.

17. The cellular system according to claim 16, wherein said reception quality monitoring means of said mobile station measures reception quality using a pilot channel transmitted from each of said base stations to all the mobile stations constantly.

18. The cellular system according to claim 16, wherein said transmission control means of said base station stops transmission when an error in the sub-signal is detected.

19. The cellular system according to claim 16, wherein said transmission halt signal generating means does not output the transmission halt signal when downward reception quality of all the base stations is smaller than a predetermined value and the quality of downward signals from its own station is ranked more than a predetermined grade.

20. In a cellular system using a direct spread code division multiple access system, a mobile station used in the cellular system for performing soft handover with plural base stations comprising:

reception quality monitoring means for monitoring reception quality of downward signals from the plural base stations that are in the soft handover state and outputting a sub-signal composed of the monitoring results and signals indicative of base stations corresponding to the respective results;

multiplexing means for multiplexing the sub-signal into an upward signal to be sent to said plural base stations; and

reception means for performing combined reception of receive signals from said plural base stations that are in the soft handover state.

21. The mobile station according to claim 20, wherein said reception quality monitoring means of said mobile station measures reception quality using a pilot channel transmitted from each of said base stations to all the mobile stations constantly.

22. In a cellular system using a direct spread code division multiple access system, a base station used in the cellular system in which a mobile station performs soft handover with plural base stations, the base station receiving an upward signal from the mobile station with multiplexing therein a sub-signal composed of results of monitoring reception quality of downward signals from the plural base stations put into connection of soft handover to the mobile station and signals indicative of base stations corresponding to the respective monitoring results, said base station comprising:

demodulation means for demodulating the sub-signal;

transmission halt signal generating means for generating a transmission halt signal indicating whether or not transmission of downward signals from its own station are to be halted in accordance with the demodulated sub-signal; and

transmission control means for stopping the transmission of downward signals to said mobile station when the transmission halt signal indicates transmission halt.

23. The base station according to claim 22, wherein said transmission control means of said base station stops transmission when an error in the sub-signal is detected.

24. The base station according to claim 23, wherein said transmission halt signal generating means does not output the transmission halt signal when downward reception quality of all the base stations is smaller than a predetermined value and the quality of downward signals from its own station is ranked more than a predetermined grade.

Abstract of the Disclosure

When a mobile station becomes a soft handover state, a reception quality monitor 104 measures reception quality of a pilot signal from each base station. Base station specifying means 105 generates a base-station select signal (BSsel) to specify base stations that have transmitted pilot channels of inferior reception quality. The base-station select signal is multiplexed with transmission data (r-txd), and the multiplexed signal is spread at a spreading circuit. The spread signal is transmitted to plural base stations through a transmitter 111 and a duplexer 102. Then the base stations specified by this base-station specify signal stops transmission of downward signals.

Fig. 1

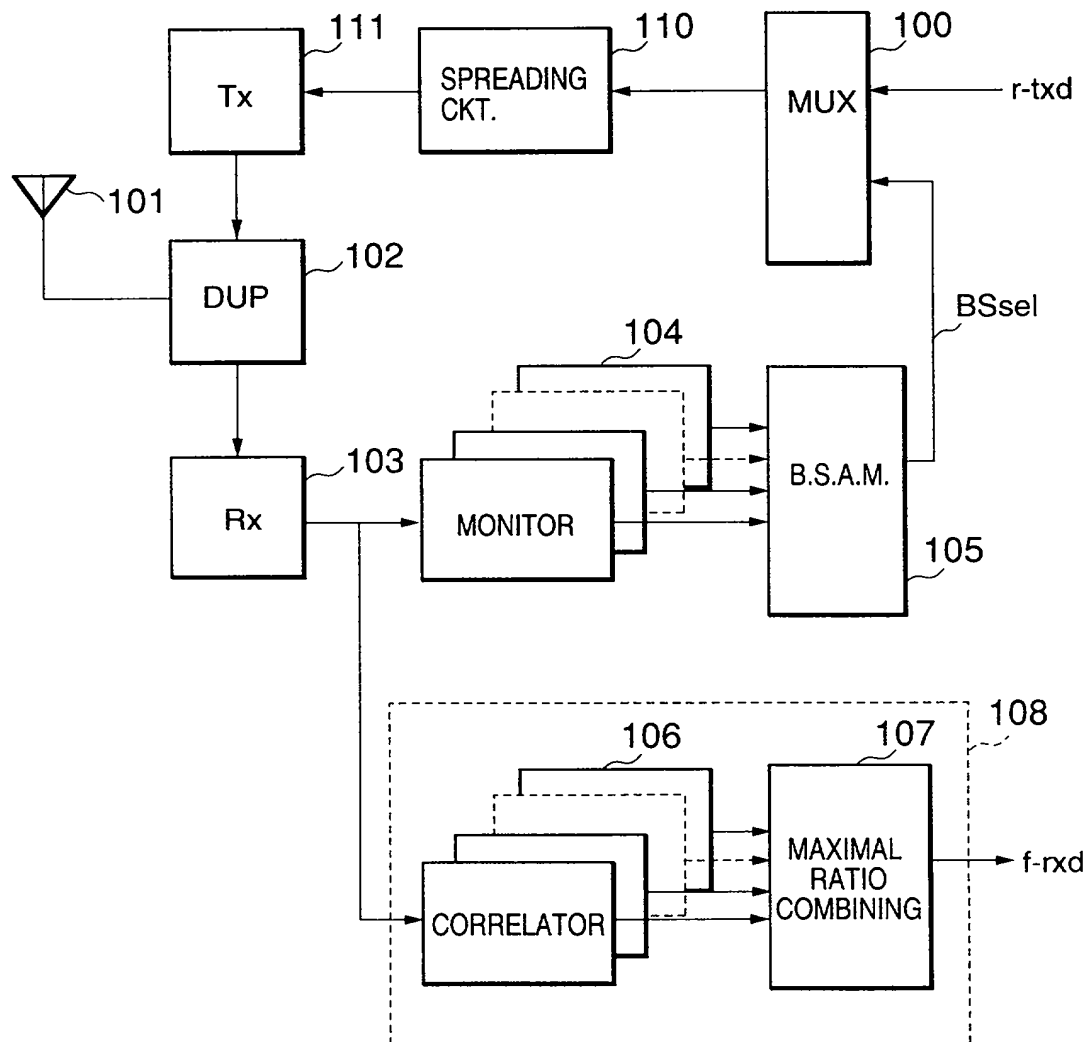


Fig. 2


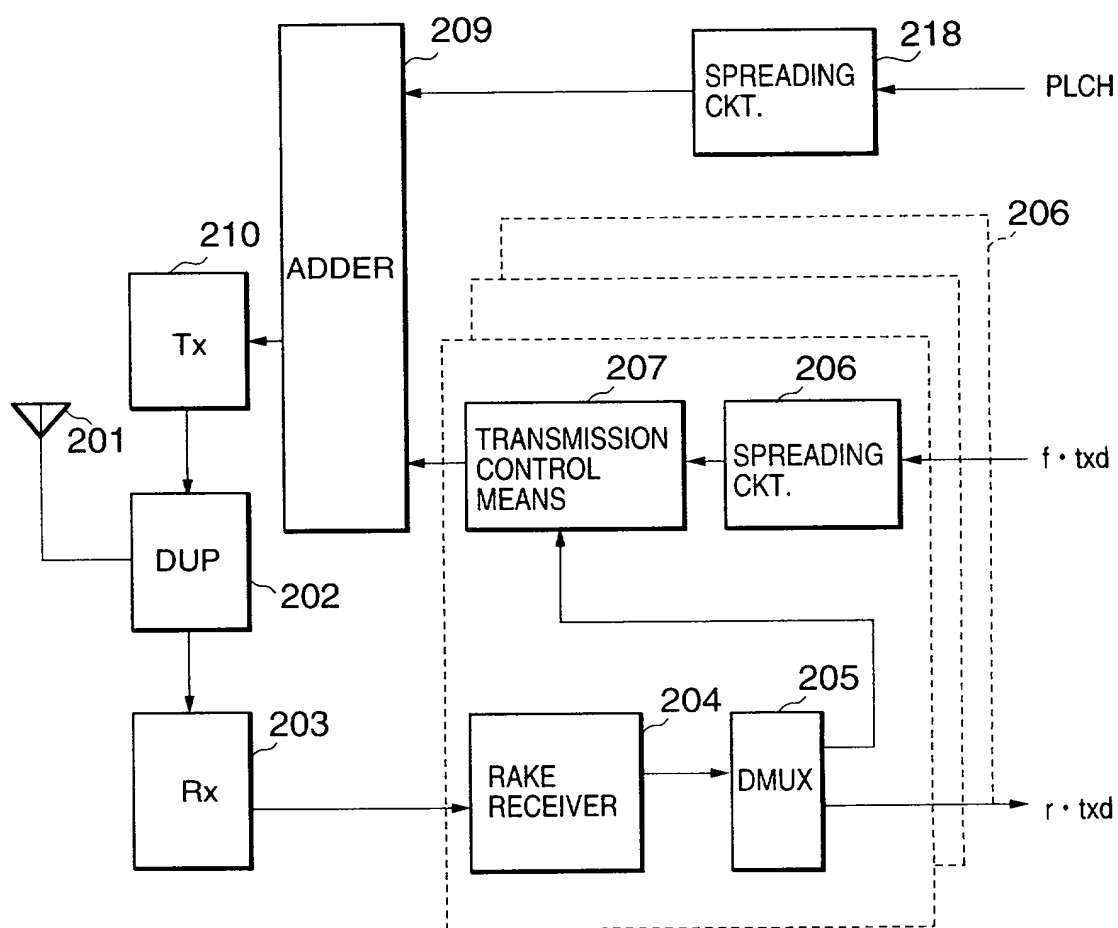


Fig. 3

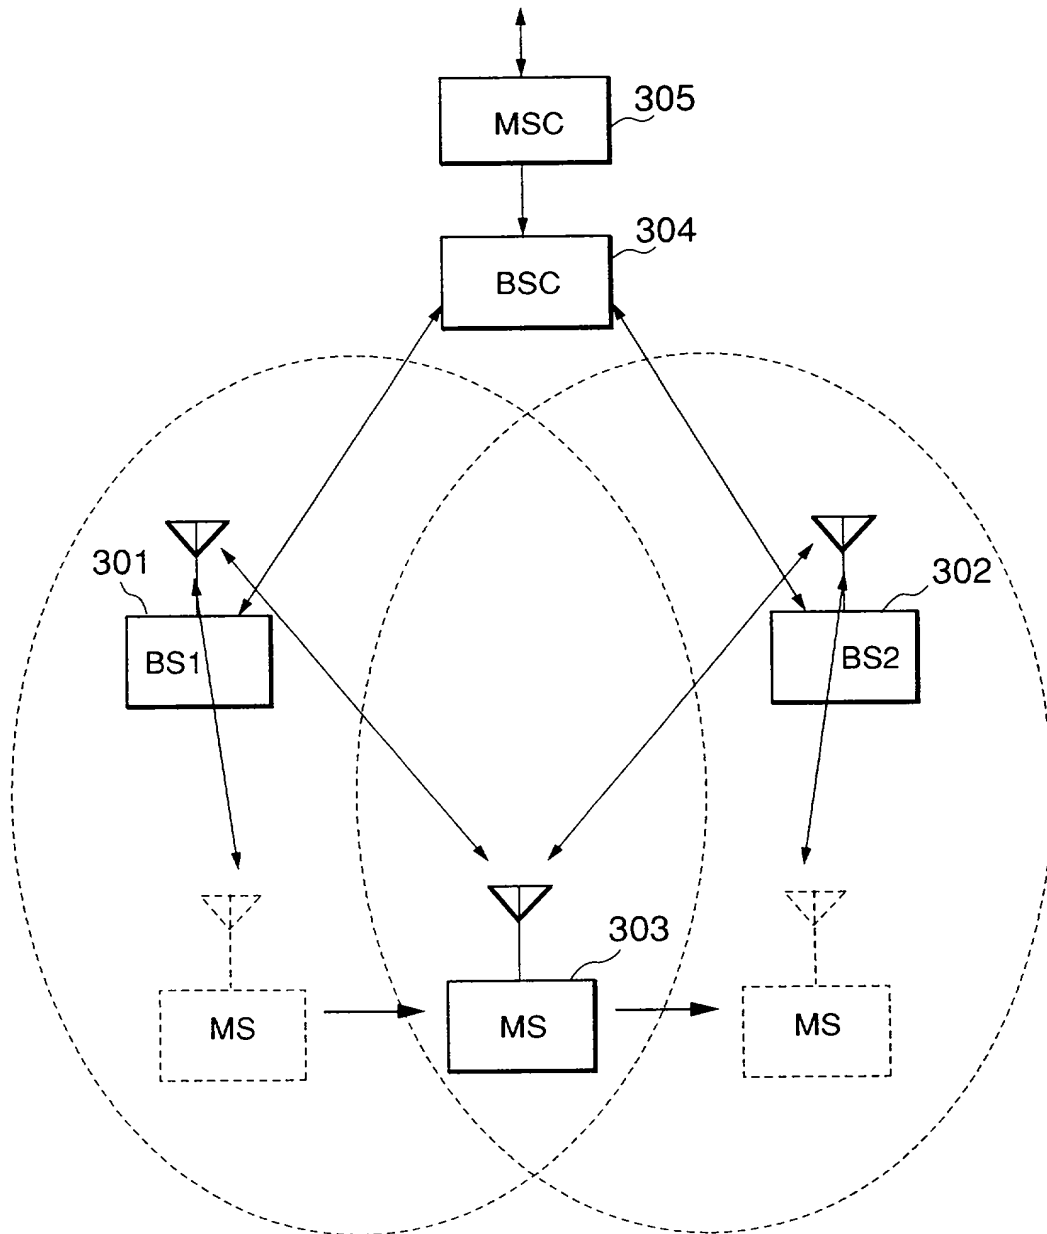

4/6
Fig. 4

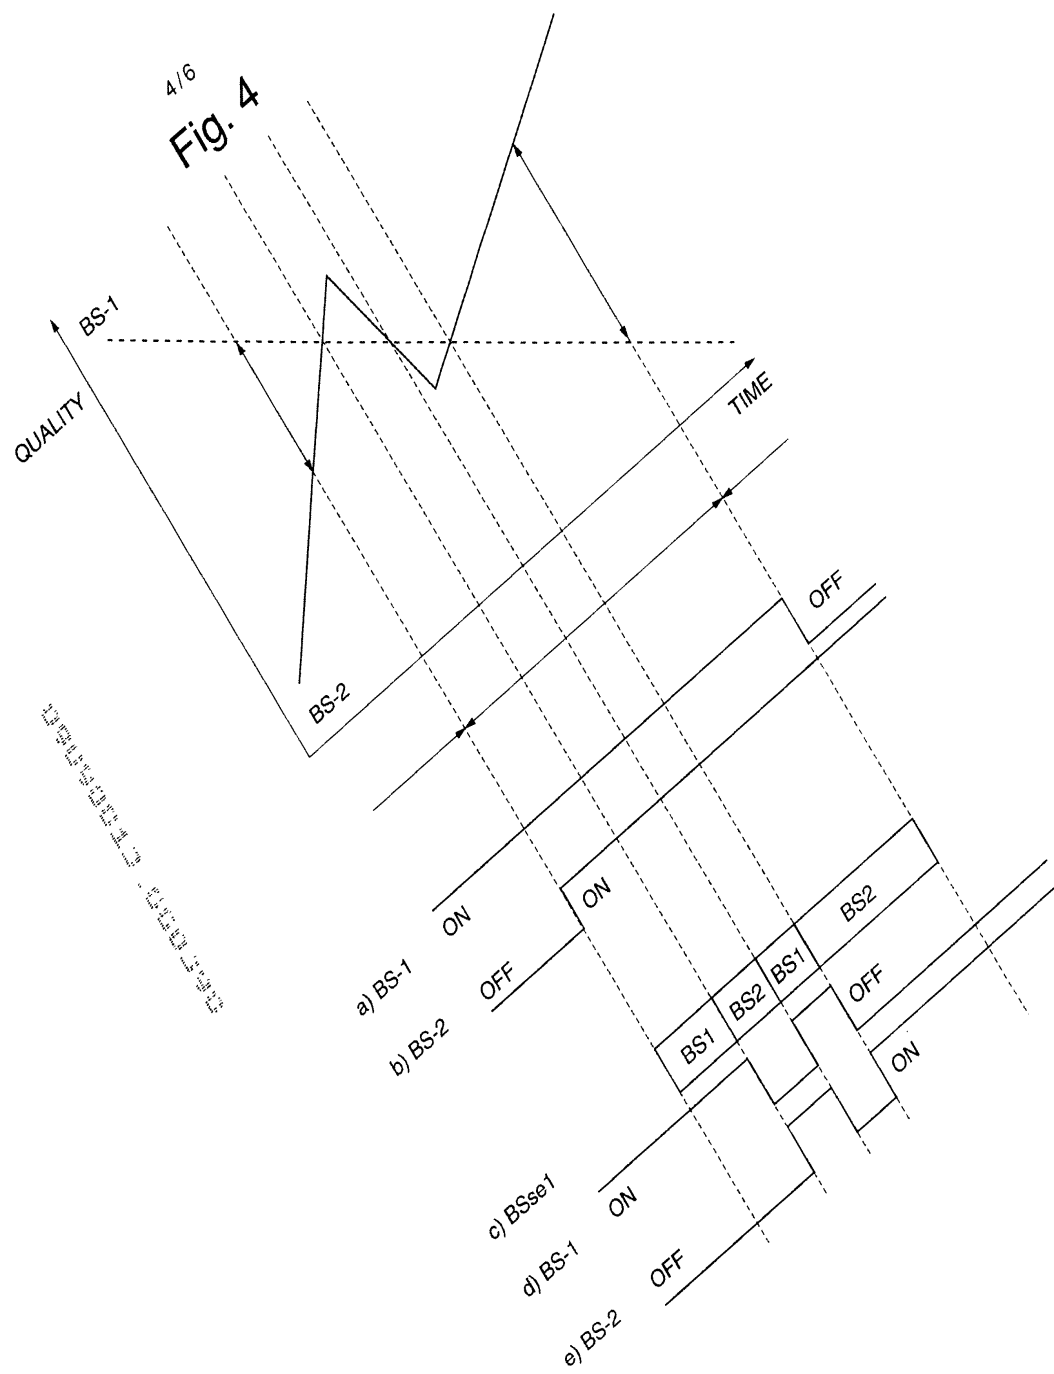


Fig. 5

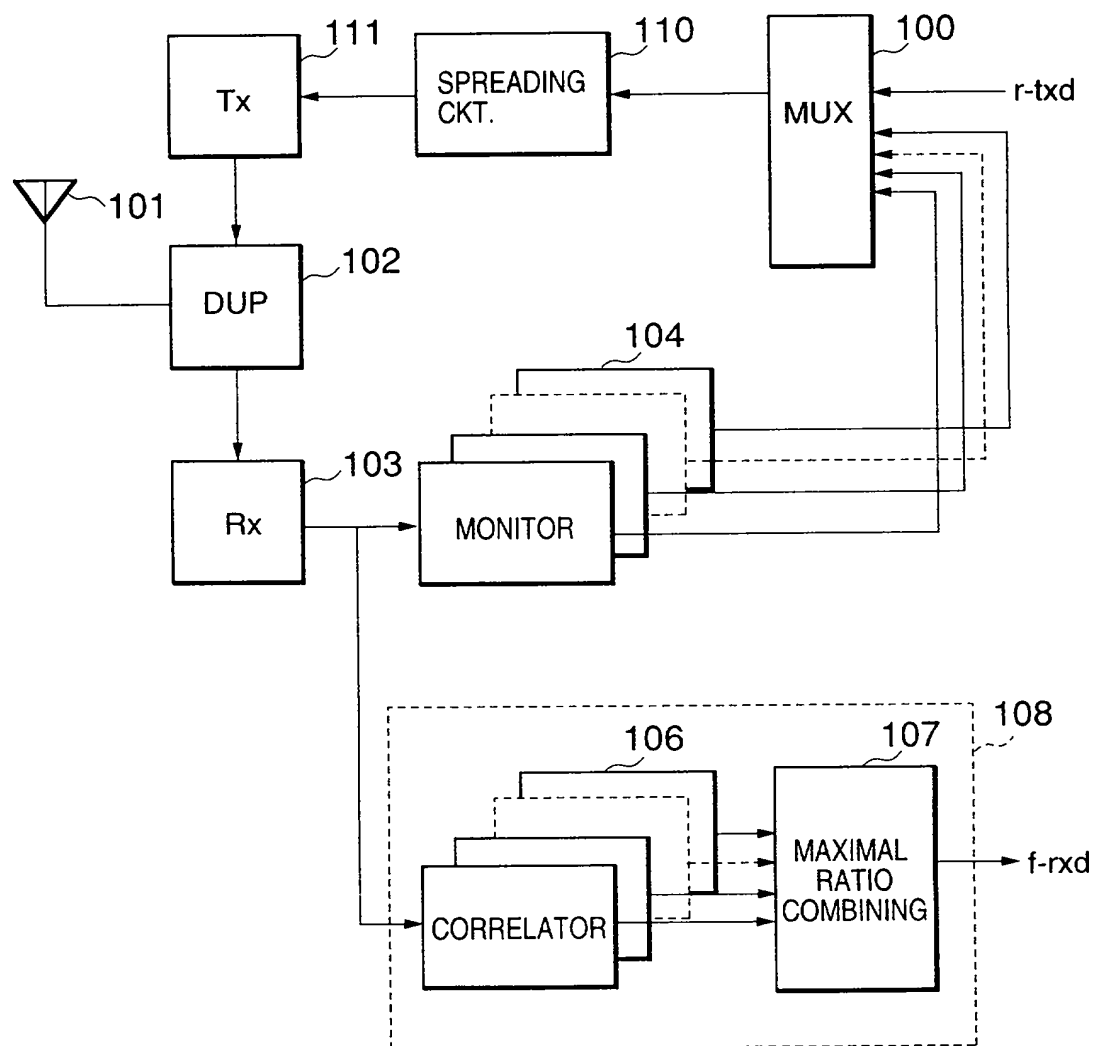


Fig. 6

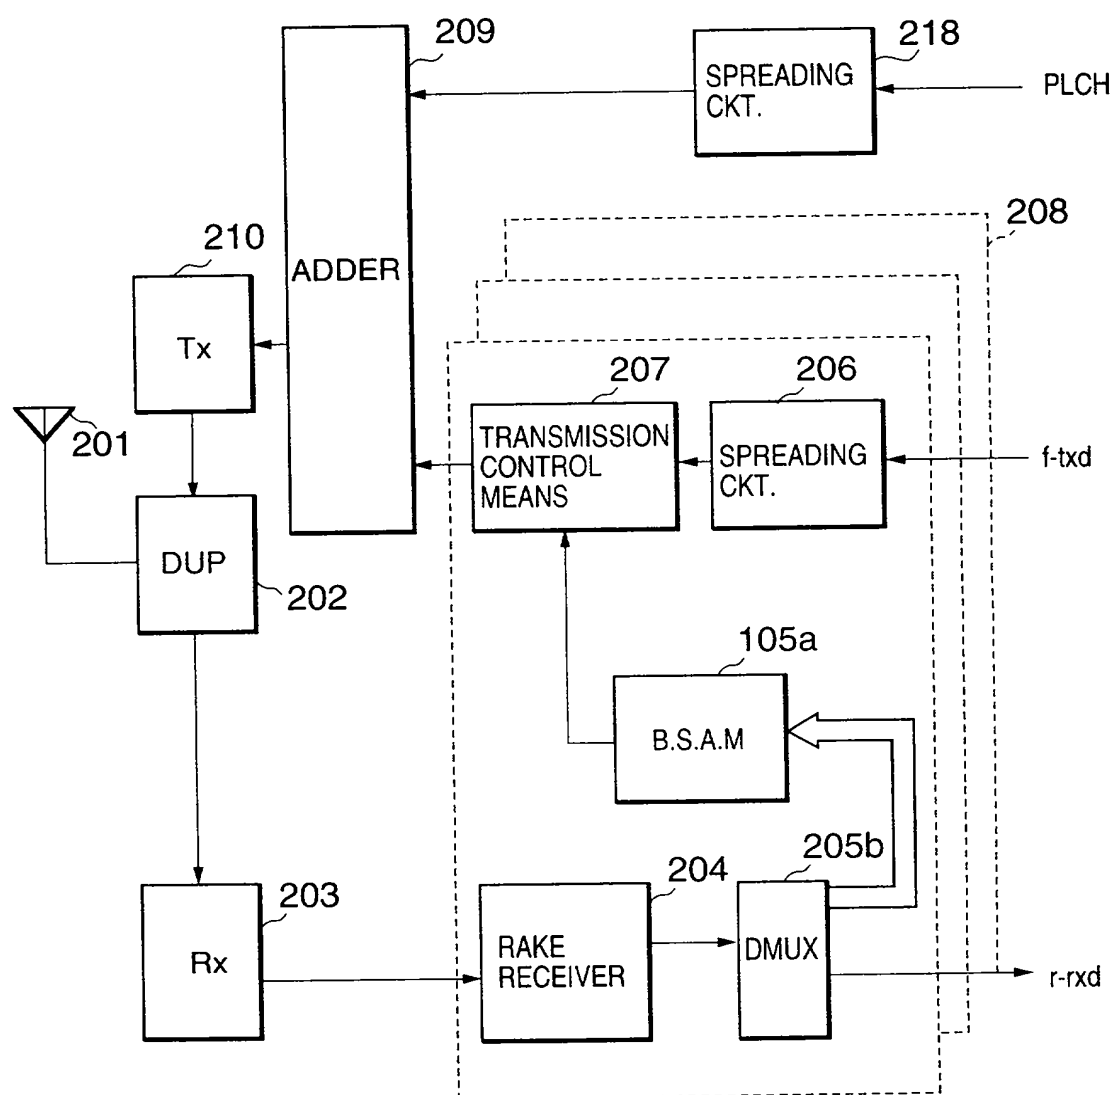


Fig. 1

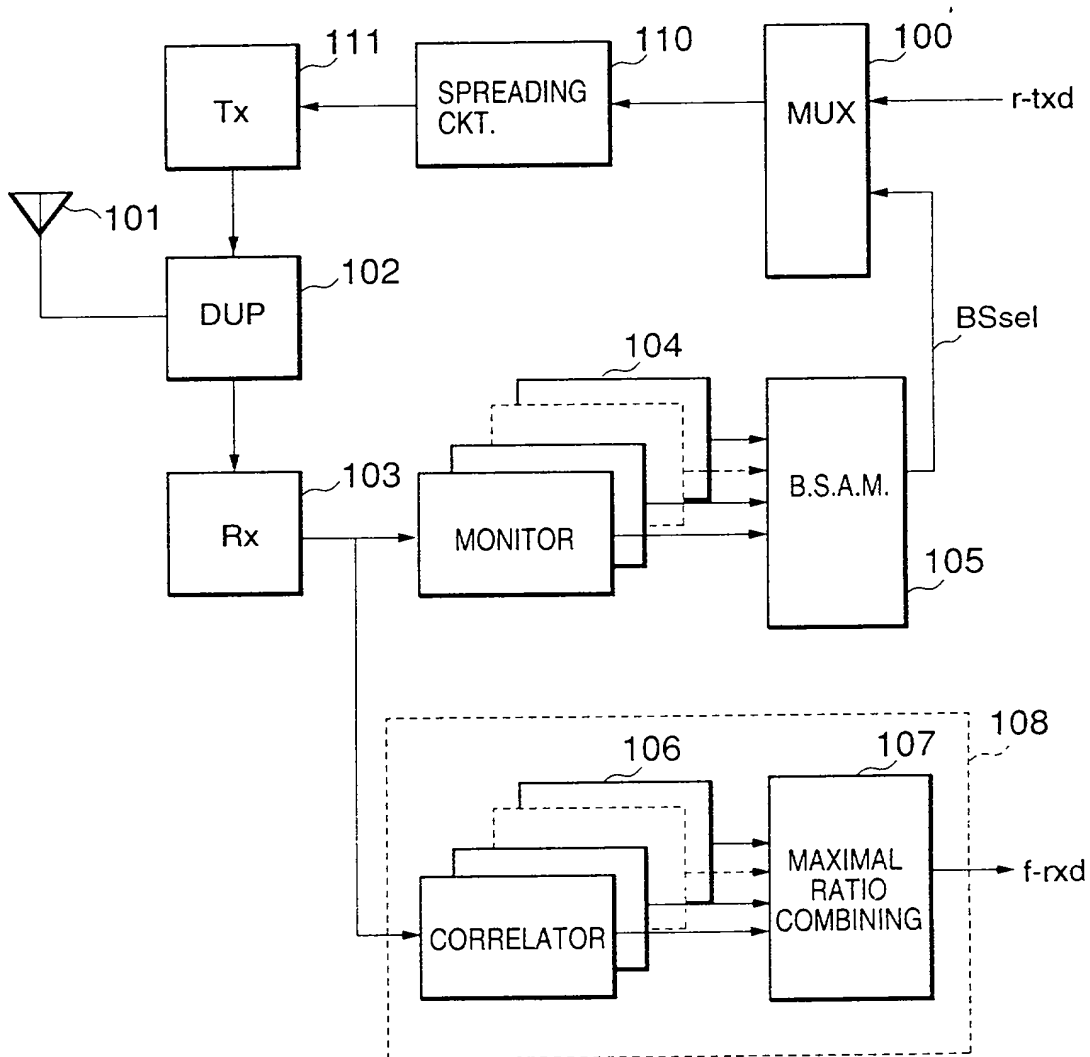


Fig. 2

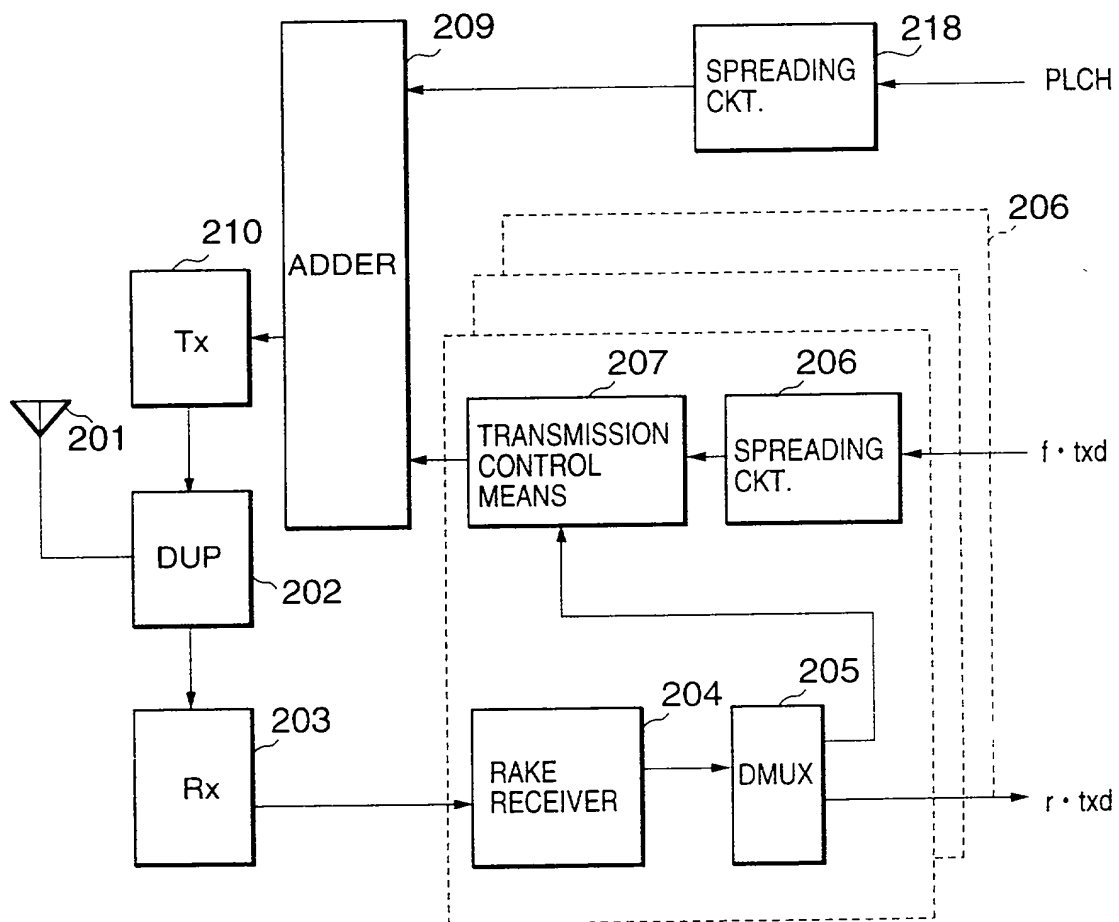


Fig. 3

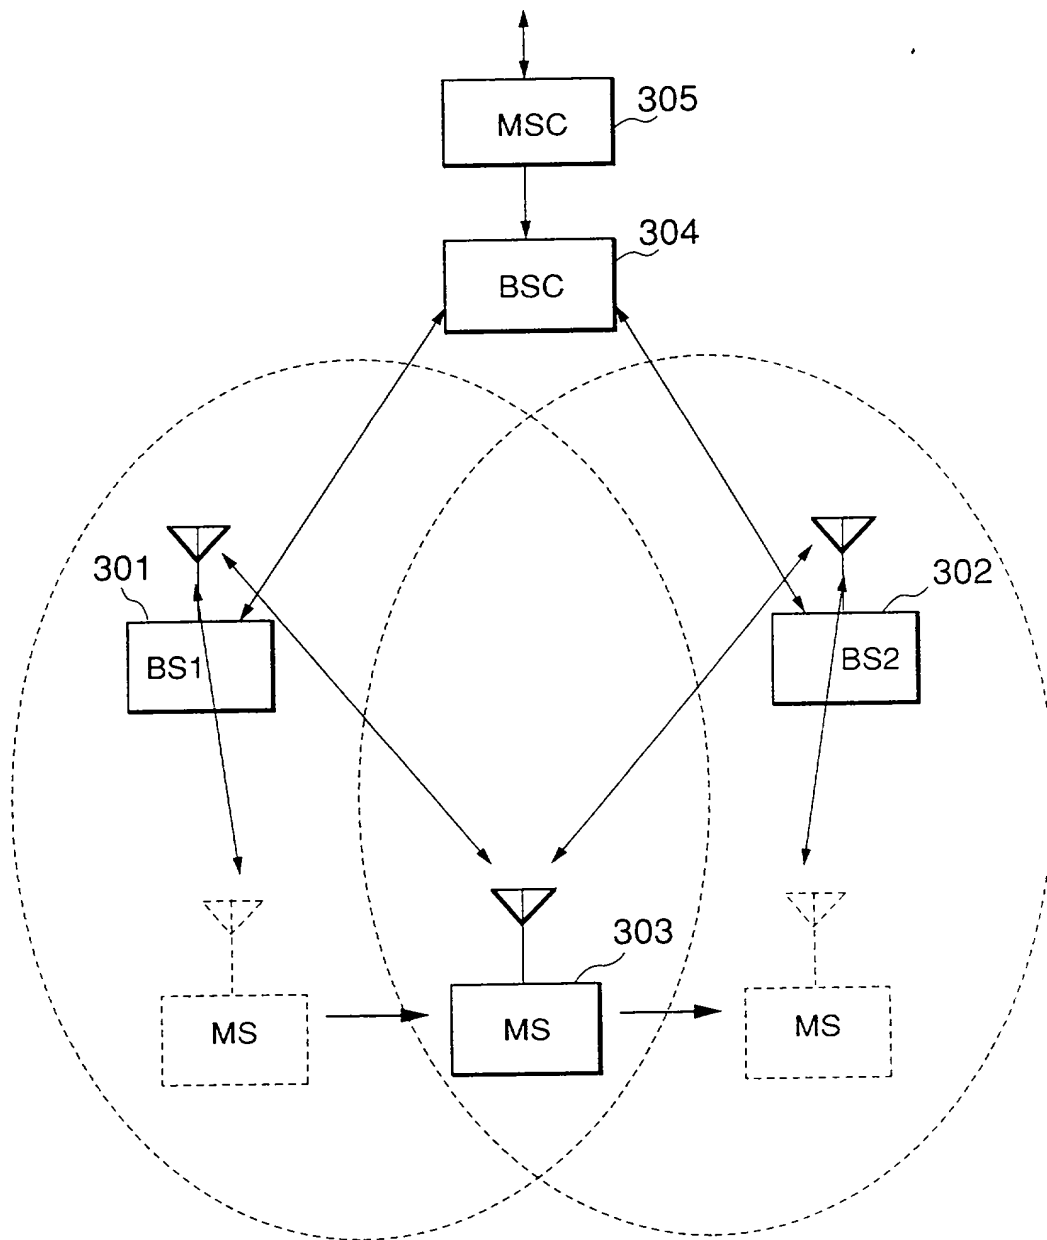


Fig. 4

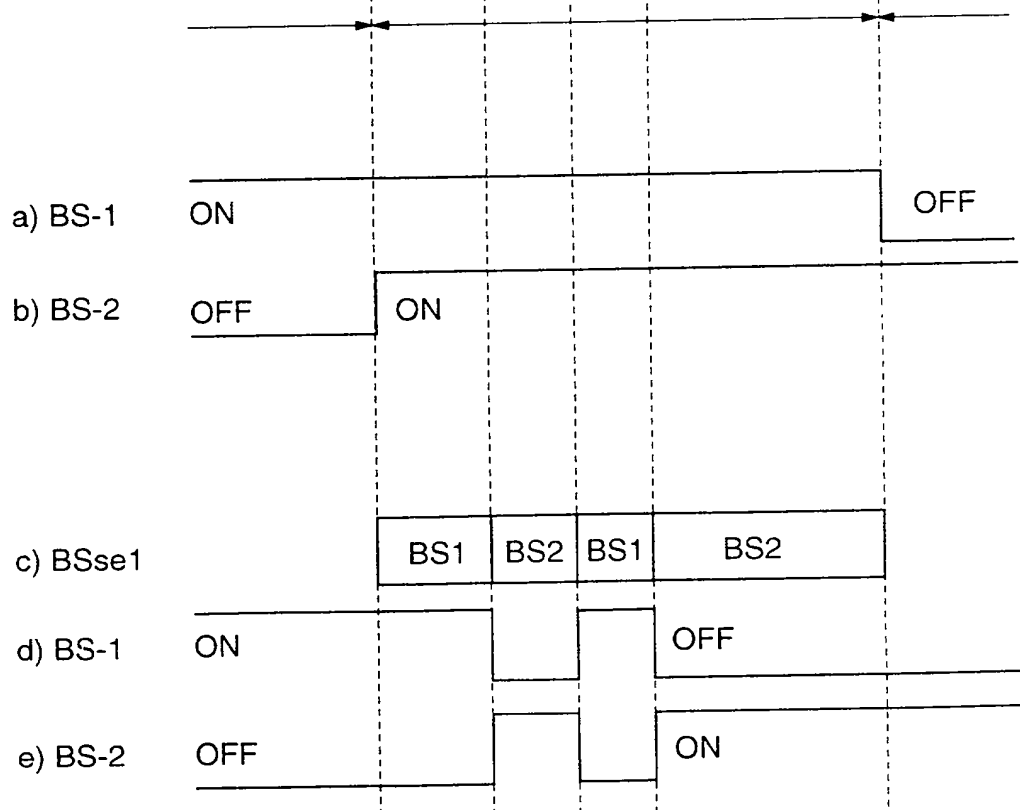
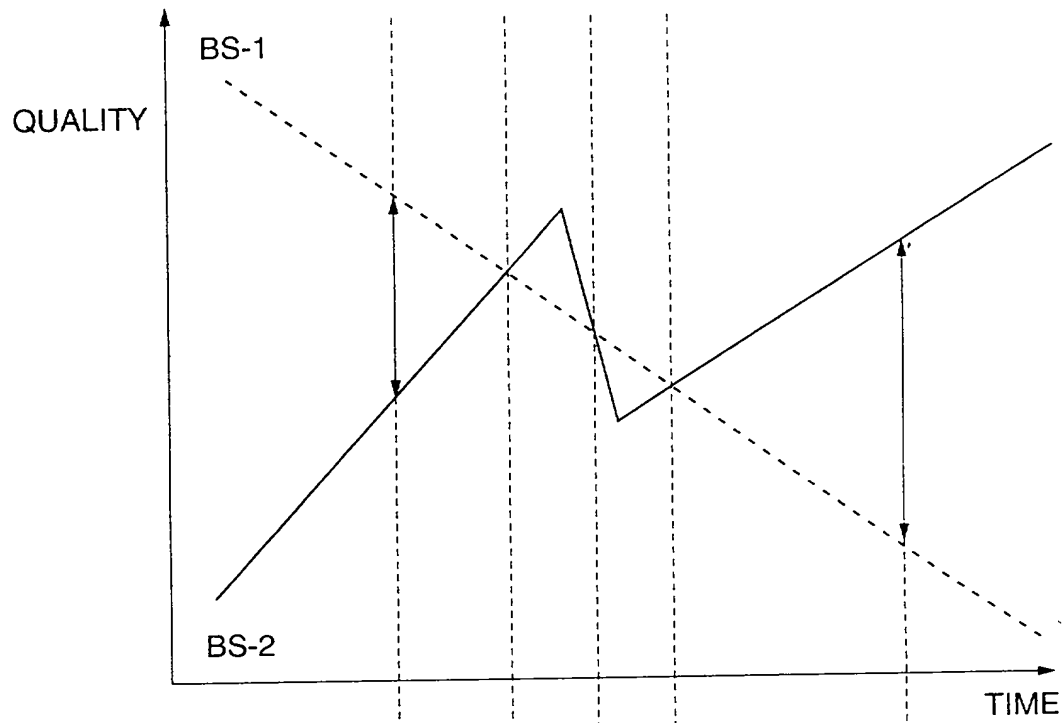


Fig. 5


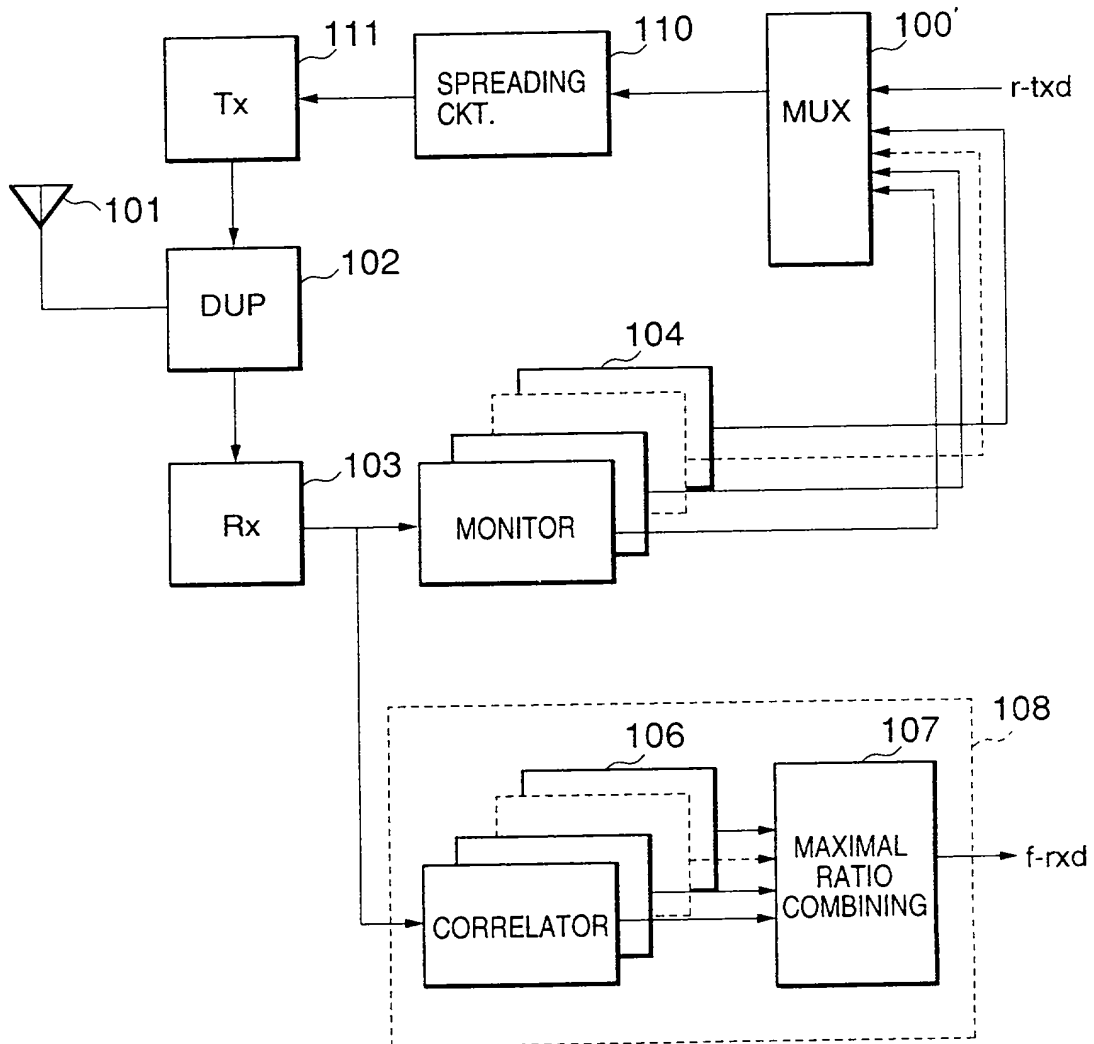


Fig. 6

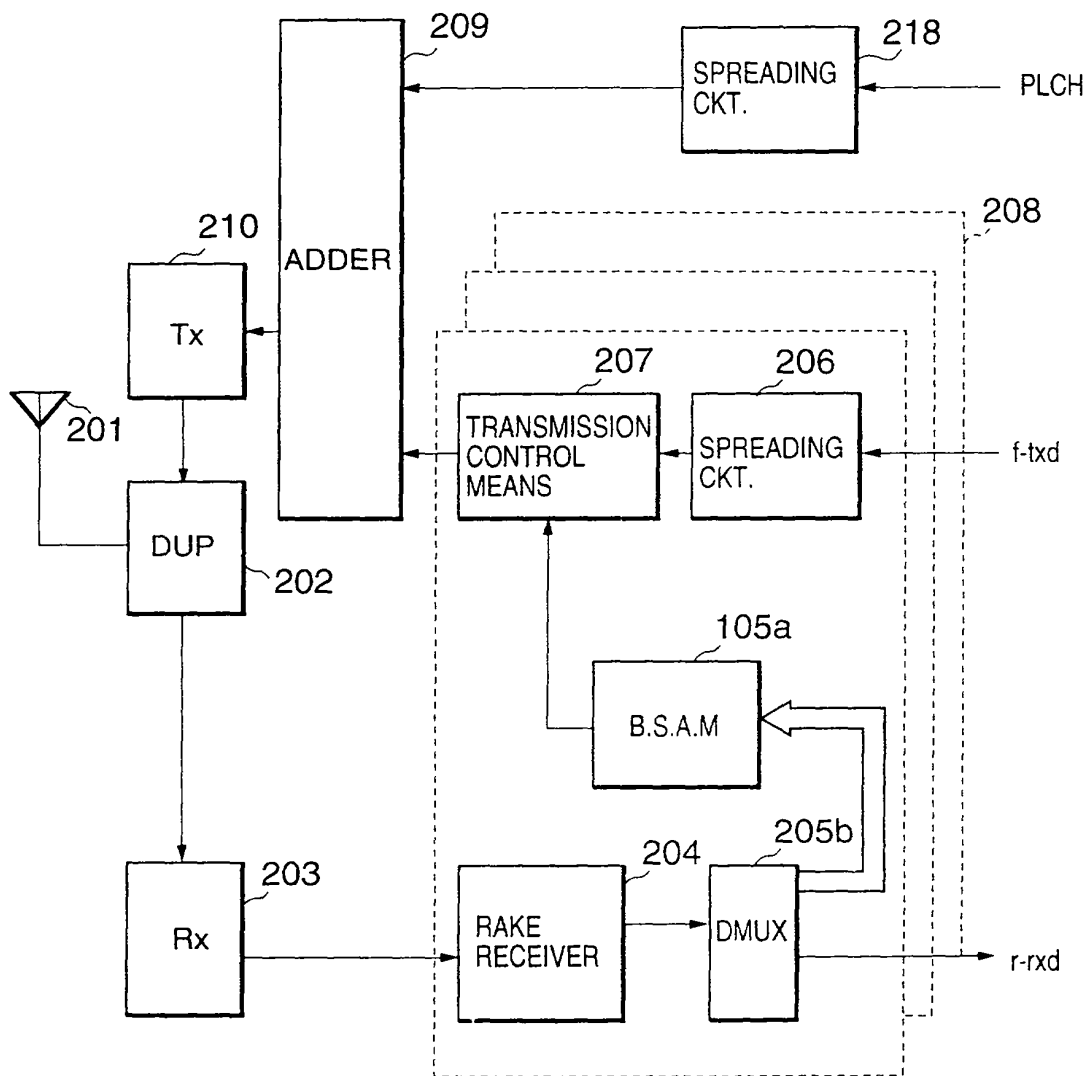

UNITED STATES OF AMERICA
COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

OFGS FILE NO.

P/29-920

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CELLULAR COMMUNICATION SYSTEM, AND MOBILE AND BASE STATIONS USED IN THE SAME

the specification of which is attached hereto, unless the following box is checked:

☐ was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign or Provisional Application(s)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	151072/1997	9, 6, 1997	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)

I hereby appoint OSTROLENK, FABER, GERB & SOFFEN, and the members of the firm, Marvin C. Soffen - Reg. No. 17,542; Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944 and Louis C. Dujmich - Reg. No. 30,625, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent & Trademark Office connected therewith and to receive all correspondence.

SEND CORRESPONDENCE TO: OSTROLENK, FABER, GERB & SOFFEN
1180 AVENUE OF THE AMERICAS
NEW YORK, NEW YORK 10036-8403

DIRECT TELEPHONE CALLS TO:
(212) 382-0700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR TOSHIFUMI SATO		INVENTOR'S SIGNATURE <i>Toshifumi Sato</i>	DATE May 27, 1998
RESIDENCE Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan	
POST OFFICE ADDRESS c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan			
FULL NAME OF SECOND JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	DATE
RESIDENCE		COUNTRY OF CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF THIRD JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	DATE
RESIDENCE		COUNTRY OF CITIZENSHIP	
POST OFFICE ADDRESS			

☐ CONTINUED ON PAGE 2